

# AZ DISPLAYS

---

## SPECIFICATIONS FOR P-CAP USB-HID BOARD

CUSTOMER APPROVAL			
※ PART NO. : <u>ZEDP SERIES P-CAP USB- HID BOARD</u>			
APPROVAL		COMPANY CHOP	
CUSTOMER COMMENTS			

AZ DISPLAYS ENGINEERING APPROVAL		
DESIGNED BY	CHECKED BY	APPROVED BY




## 1. Features:

- +5 VDC, nominal (+4.75 to +5.25 Vdc)
- 40 mA, typical at +5 VDC
- Interface: USB HID
- Touch Resolution: From 480\*272 to 1280\*800


## 2. Reliability:

- Temperature: Operating: -20°C to 70°C.  
Storage: -30°C to 80°C.
- Humidity: Operating: 10% to 90% RH, non-condensing.  
Storage: 10% to 90% RH, non-condensing.
- Shock and Vibration: Three axis sine wave, 50 Hz to 2kHz, 1 G, 2 minutes/Octave with dwell on resonances.
- Flammability: The printed circuit board substrate is rated 94V0. All plastic components, such as headers and connectors, are also rated 94V0.

### 3. Physical Characteristics(Unit: mm):

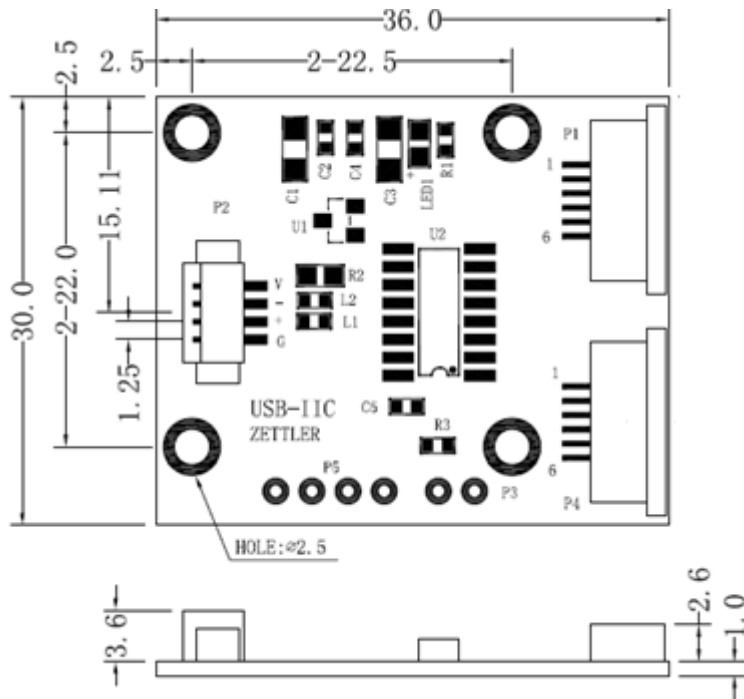

Product photo:

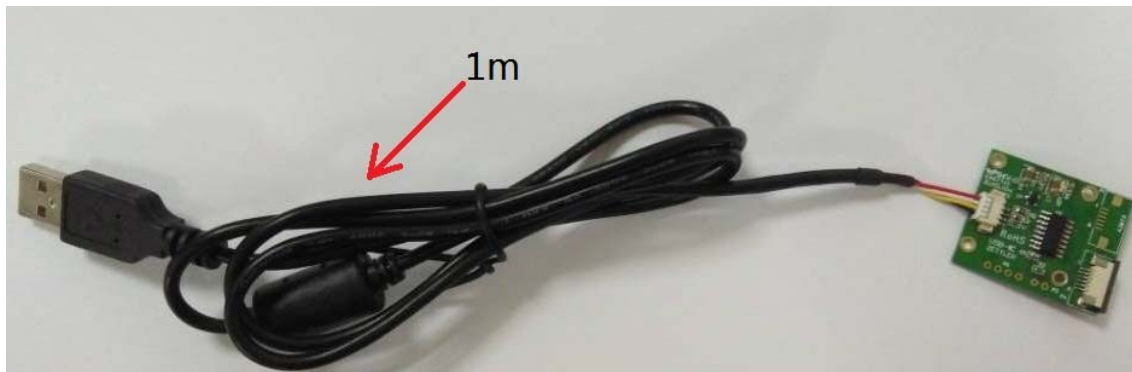

### 4. USB interface description:

PIN	Function
1	V Bus (+5V)
2	Data-
3	Data+
4	GND(0V)



## 5. P/N DESCRIPTION

ZEDP0430D12

XXXX:	LCM series
XXXX:	LCM size
P:	P-cap USB-HID
D:	Drive board
ZE:	ZETTLER

### Available P/N:

#### **ZEDP0430D12**

For ATM0430D12x / ATM0430D35x series

#### **ZEDP0430D44**

For ATM0430D44 series

#### **ZEDP0500D19**

For ATM0500D19x / ATM0500D27x series

#### **ZEDP0700D6**

For ATM0700D6x / ATM0700D38B series

#### **ZEDP0700L61**

For ATM0700L61x series

#### **ZEDP1010L19**

For ATM1010L19x series